

## SlimLamp Slide

LED for Display, Cabinet, Furniture & Cove

Stable, Secure and Smart Locking System



- Easy slide connecting system
- Slim design with seamless lighting
- Dimmable
- Round diffuser(Square also available)
- Slide-Up Replacing System



Round diffuser  
Standard



Square diffuser  
Optional





**Specification**


Model Name	Voltage Input	Energy Consumption	Power Factor	Luminous Flux	Energy Efficiency	Color Rendering	Available Color	Operating temperature	Dimming
SSL5 40K-UNV-C90	AC100-240V	5W	PF > 0.9	450 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C	Non dimming
SSL10 40K-UNV-C90	AC100-240V	10W	PF > 0.9	900 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C	Non dimming
SSL15 40K-UNV-C90	AC100-240V	15W	PF > 0.9	1,350 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C	Non dimming
SSL20 40K-UNV-C90	AC100-240V	20W	PF > 0.9	1,800 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C	Non dimming
DSSL10 40K-UNV-C90	AC100-240V	10W	PF > 0.9	900 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C	Dimming
DSSL15 40K-UNV-C90	AC100-240V	15W	PF > 0.9	1,350 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C	Dimming
DSSL20 40K-UNV-C90	AC100-240V	20W	PF > 0.9	1,800 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C	Dimming

**Dimension**


Model Name	Voltage Input (V)	Energy Consumption (W)	A (mm)	B (mm)	C (mm)
SSL5 40K-UNV-C90	AC100-240V	5	320	32.3	35.2
SSL10 40K-UNV-C90	AC100-240V	10	580	32.3	35.2
SSL15 40K-UNV-C90	AC100-240V	15	870	32.3	35.2
SSL20 40K-UNV-C90	AC100-240V	20	1,160	32.3	35.2
DSSL10 40K-UNV-C90	AC100-240V	10	580	32.3	35.2
DSSL15 40K-UNV-C90	AC100-240V	15	870	32.3	35.2
DSSL20 40K-UNV-C90	AC100-240V	20	1,160	32.3	35.2

**Notice**

- Max.connection(Dimming) : 20 pcs
- Max.connection(Non dimming) : 400W
- 5W(80pcs), 10W(40 pcs), 15W(26pcs), 20W(20 pcs)

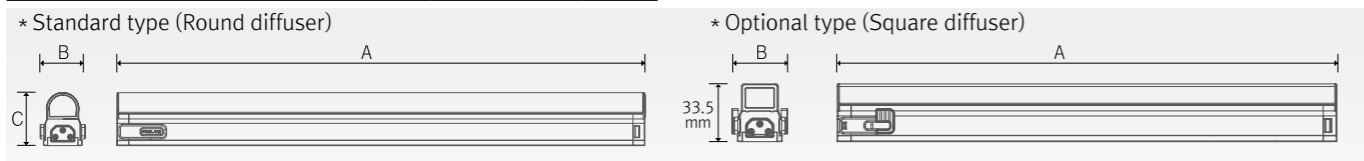

**Connection**

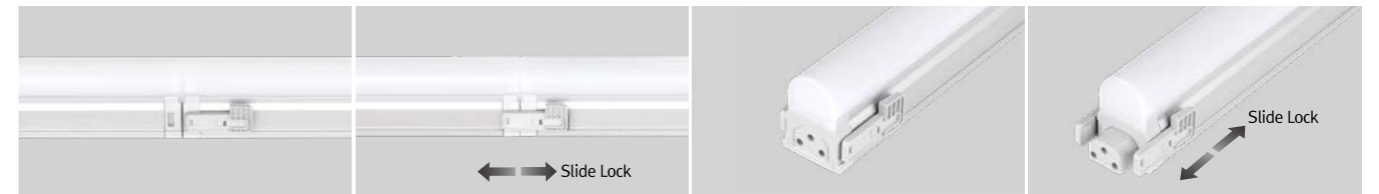

**Accessories**


**Ⓐ Connecting cable**

SSLPTC/T	SSLPTC1/T	SSLPTC2/T	SSLPTC4/T	SSLPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)



**Ⓑ Power cord (1800mm) (Non dimming)**

SSLPC230/T

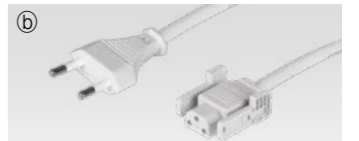

**Ⓒ Open power cord (1800mm) (Dimming)**

DSSLOPC230/T



**Ⓓ Mounting bracket (Metal Bracket)**

SSL-BRACKET1(A) : 1set = 2pcs  
SSL-BRACKET1(B) : 1set = 3pcs



**Ⓔ Dimming Interface (Phase to PWM translator)**

FDA-P1H : 1CH 200W (200W/CH, 1CH)



**Ⓕ Dimming Interface (DMX512 to PWM translator)**

FDA-P2M : 2CH Max 400W (200W/CH, 2CH)



**Ⓖ Dimming Interface (0-10V/1-10V to PWM translator)**

DA02V10SE : Max. 400W (200W/CH, 2CH)

