



FLXible Neon

Super Slim Flexible LED with Spot-free Output

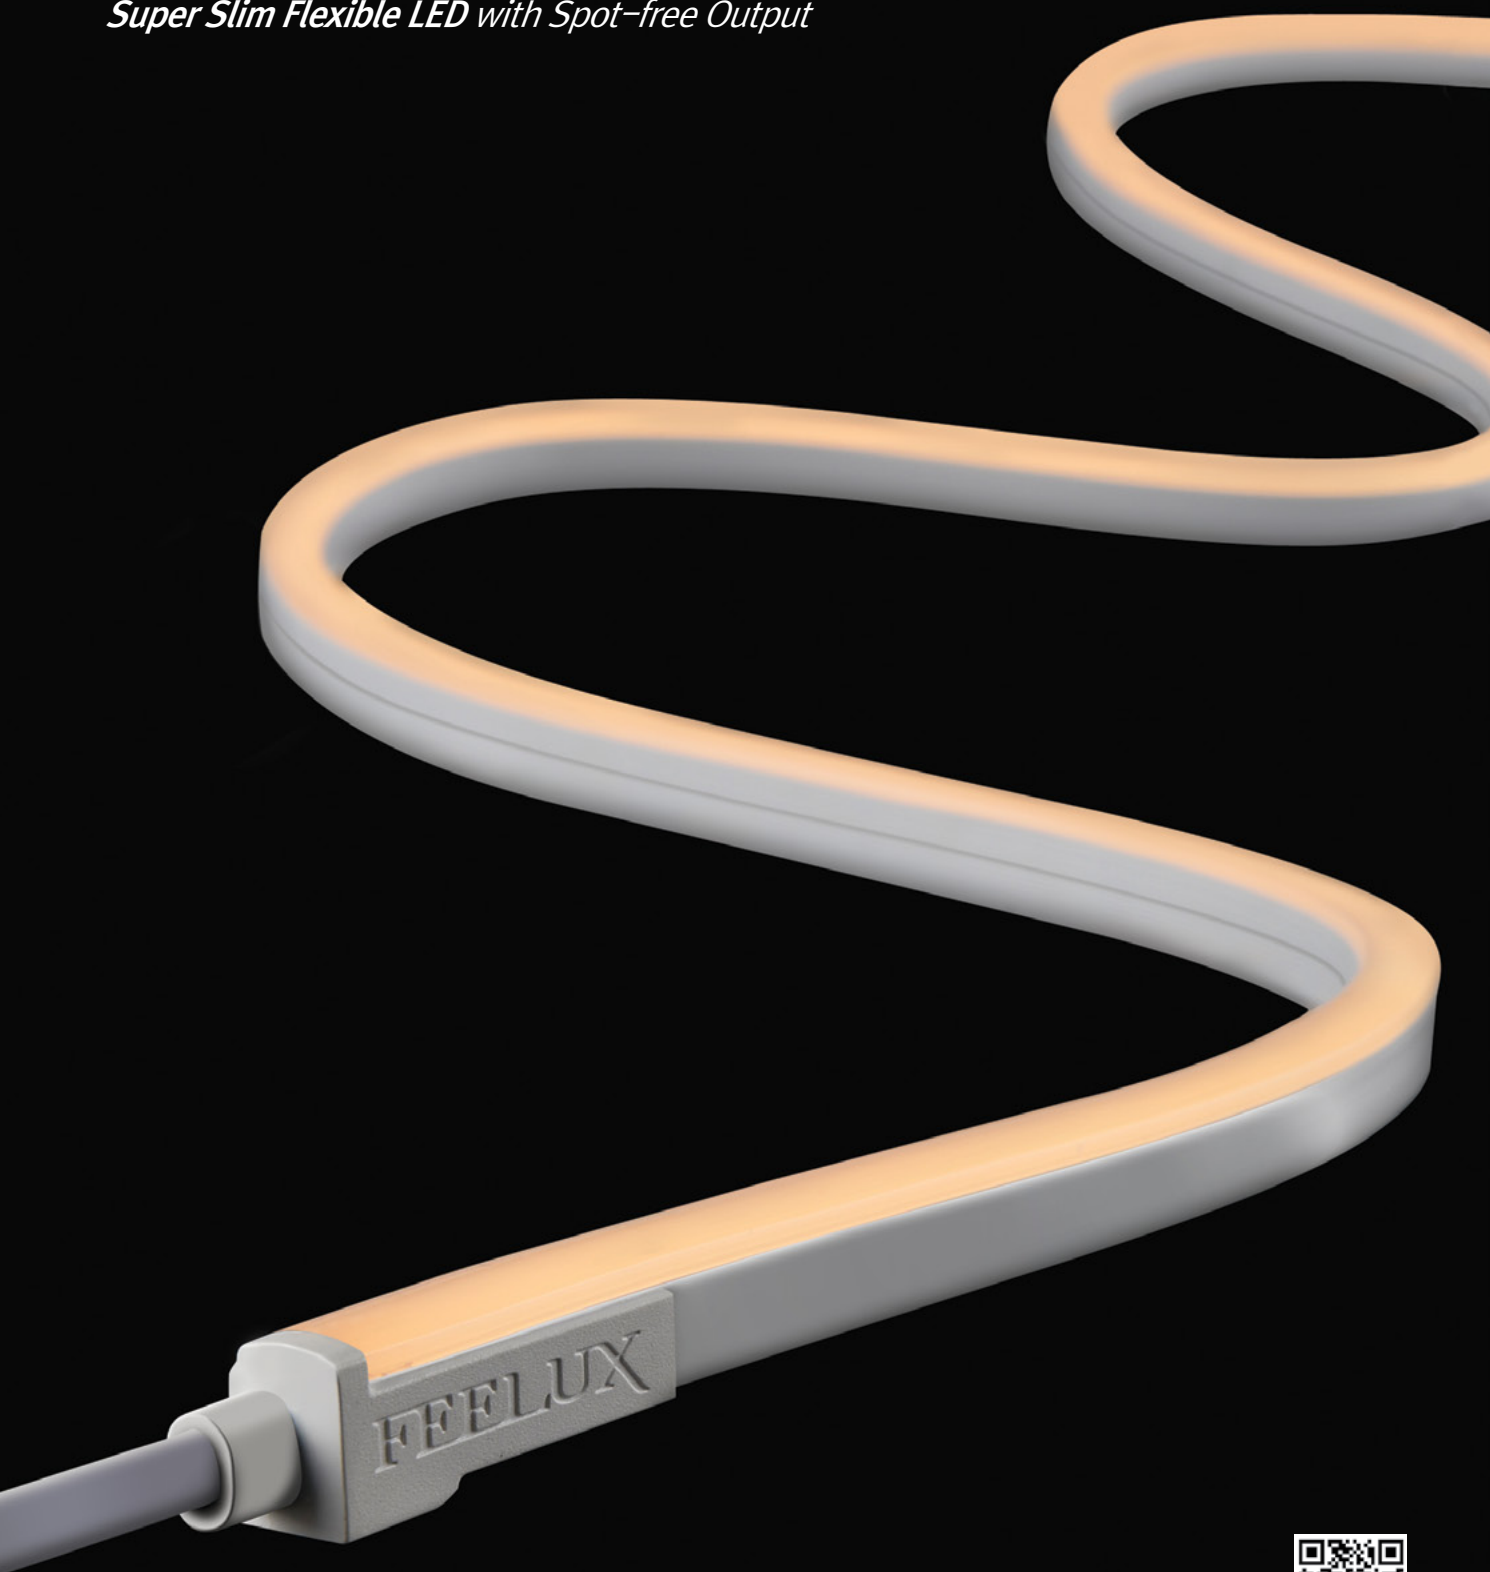

www.feelux.com

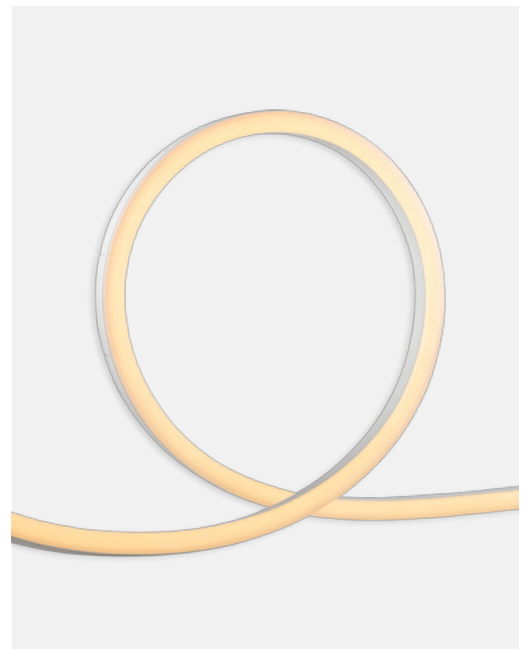

FLXible Neon 1


- Bend direction horizontally
- IP67 with Factory termination (Customized length available)
- IP65 for field termination
- 12.5W/M
- 24V DC
- Dimmable
- Spot free illumination
- indoor and outdoor application

Powerfeed Type



Model Name	Color	Luminous Flux (lm/m)	Max. Length (mm)	Min. Length (mm)	DC Voltage
FN1 27K-24V	2700K	535	5,000 (16.4')	38.5 (1.5')	DC 24
FN1 30K-24V	3000K	540			
FN1 35K-24V	3500K	626			
FN1 40K-24V	4000K	628			


Dimension

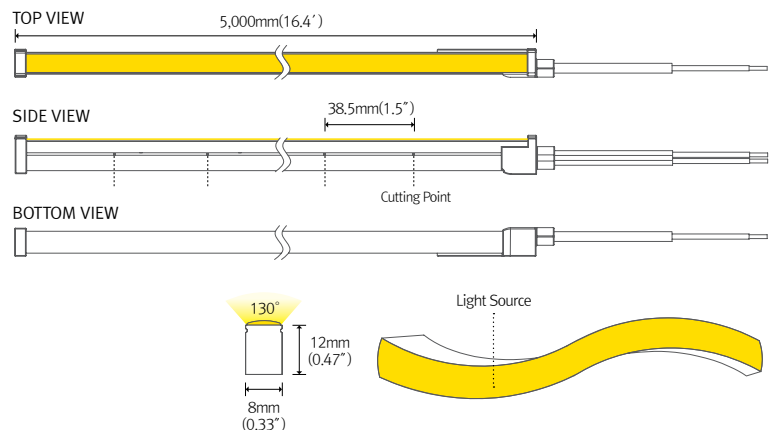


Accessories



Field Termination

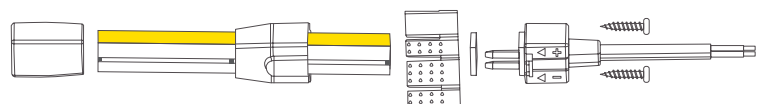

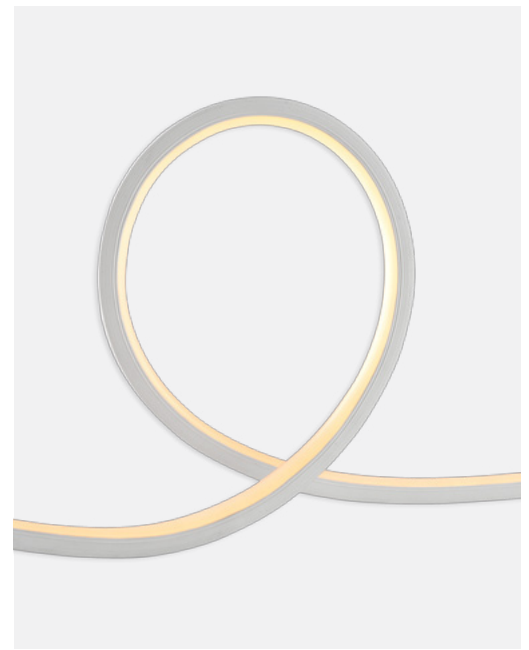

FLXible Neon 2


- Bend direction vertically
- IP67 with Factory termination (Customized length available)
- IP65 for field termination
- 12.5W/M
- 24V DC
- Dimmable
- Spot free illumination
- indoor and outdoor application

Powerfeed Type



Model Name	Color	Luminous Flux (lm/m)	Max. Length (mm)	Min. Length (mm)	DC Voltage
FN2 27K-24V	2700K	551	5,000 (16.4')	38.5 (1.5")	DC 24
FN2 30K-24V	3000K	584			
FN2 35K-24V	3500K	638			
FN2 40K-24V	4000K	647			

Dimension

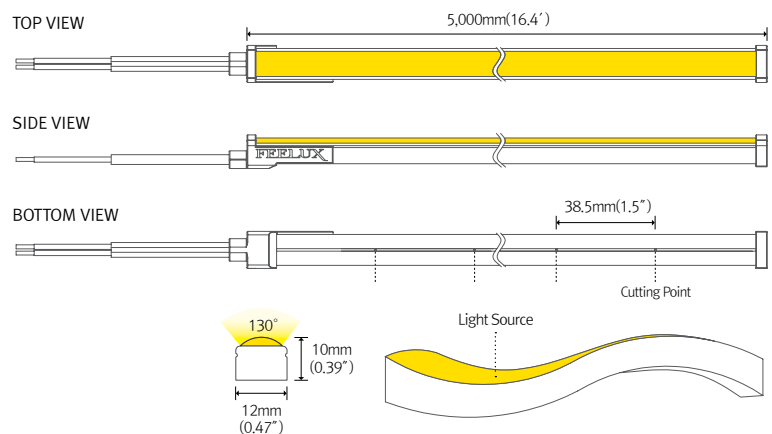

Accessories



Field Termination



FEELUX

FEELUX CO.,LTD www.feelux.com

Headquarters 235-48, Gwangjeok-ro, Gwangjeok-myeon, Yangju, Gyeonggi-do, Korea, 11414 T. +82-70-7780-8200 F. +82-70-7780-8209

Sales office 501 Junggye-1 industrial Complex Nowonro 311, Nowon-gu, Seoul, Korea, 01787 T. +82-70-7780-8200 F. +82-70-7780-8209 info@feelux.com